

FIG. 1

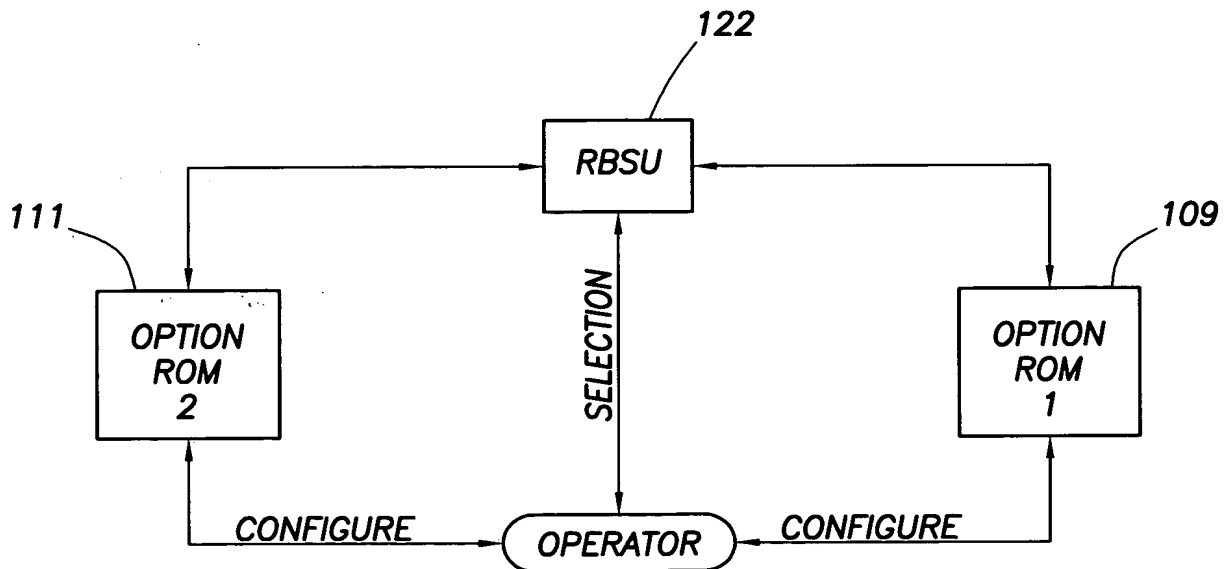


FIG. 2



2/2

200

VALUES	DESCRIPTION	LOCATION
\$,O,R,C,...,E,N,T	8 BYTE SIGNATURE TO SIGNIFY TABLE START	ANY PARAGRAPH BOUNDARY IN DCH (C800h-DFFFFh)
DW xxxxh (FILLED IN BY OPTION ROM DURING POST OPTION ROM INITIALIZATION)	16 BIT OFFSET OF OPTION ROM CONFIGURATION ENTRY POINT	SIGNATURE OFFSET+8
DW xxxxh (FILLED IN BY OPTION ROM DURING POST OPTION ROM INITIALIZATION)	16 BIT SEGMENT OF OPTION ROM-A VALUE OF 0000h MEANS ENTRY POINT NOT SUPPORTED	SIGNATURE OFFSET+10
DW 0001h	CURRENT REVISION	SIGNATURE OFFSET+12
DW 0000h	RESERVED/UNUSED	SIGNATURE OFFSET+14
DD xxxxxxxxh	PCI SUBSYSTEM VENDOR/DEVICE ID	SIGNATURE OFFSET+16
DD yyyyyyyh	SUBSYSTEM VENDOR/DEVICE ID MASK	SIGNATURE OFFSET+20

FIG.3